



1270 N River Drive • Mankato, MN 56001
Phone 800.658.7010 • pierpleasure.com


Tripod Winch

ACWT-SHIP

This new lift jack improves packaging and reduces shipping costs. You will need to install and securely tighten all bolts before using the tripod winch.



Remove the tripod winch from the shipping box. Bolts, washers and nuts will be pre-installed in the correct assembly locations.

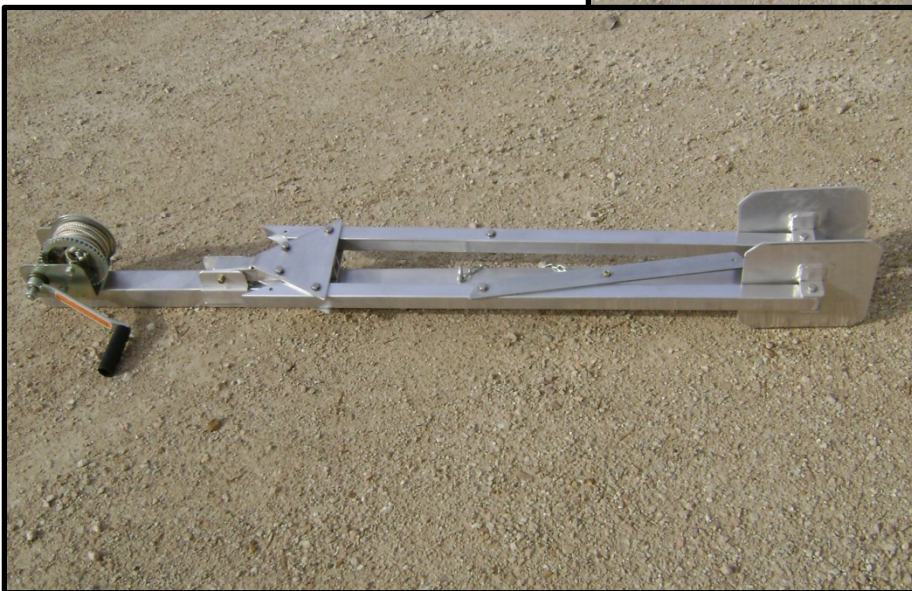

See the back of this page for complete assembly instructions.

All bolts must be installed and securely tightened before using the tripod winch. Failure to have all bolts in place could result in damage to the dock or serious bodily injury.



Photo 1

- Stand tripod winch up to assemble. (Photo 1)
- Remove the top two bolts from plates. (Photo 2)
- Rotate the tubes in between the two plates and re-install the bolts, washers and nuts (Photo 3)
- Do not tighten bolts until all 3 bolts are properly installed in all three locations.
- Remove the bolt for the bottom bar, line up holes and re-install the bolt, washers and nut. (Photo 4)
- Tighten all bolts. (Photos 5 & 6)
- Footpads need to move freely. Footpad bolts should not be over-tightened.

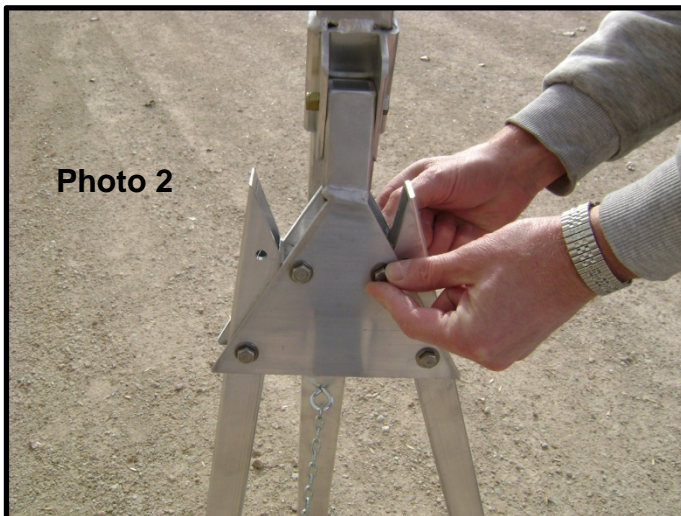


Photo 2



Photo 3



Photo 4



Photo 5



Photo 6